

MODEL CXPA024CNS1

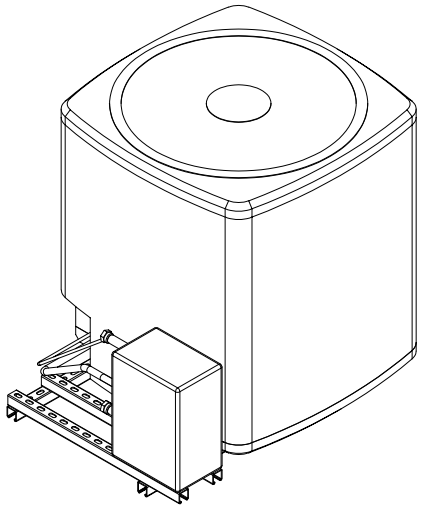


SPECIFICATIONS:
- 24,000 BTU/HR at 95°F ambient & 55°F water out
- 12,000 BTU/HR at 95°F ambient & 28°F water out
- Electrical: 208/230V, 60hz single-phase
- Minimum Circuit Ampacity: 11.2, Max Fuse Size 15 Amps
- (1) Copeland scroll compressor
- Stainless Steel Evaporator [Sized For Glycol]
- R-32 Refrigerant
- 1" FNPT Water/Glycol Connections
- Flow switch safety cut-off
- Low ambient start of 0°F
- Approximate shipping weight 350 LBS
- Dimensions: 36-3/4" long, 26" wide, 34" tall
- ETL & UL Listed Components
- Decibels: 72

OPTIONS:
- Low Temp (LT)
- Temp Controller Extension (+19')
- Caster Wheels
- Two-stage Compressor
- Anti-corrossive Coating


TOP

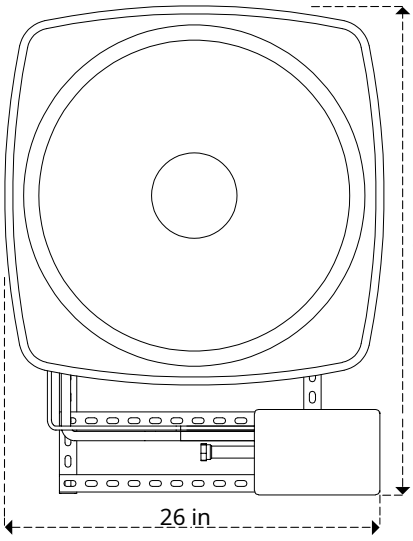

FRONT

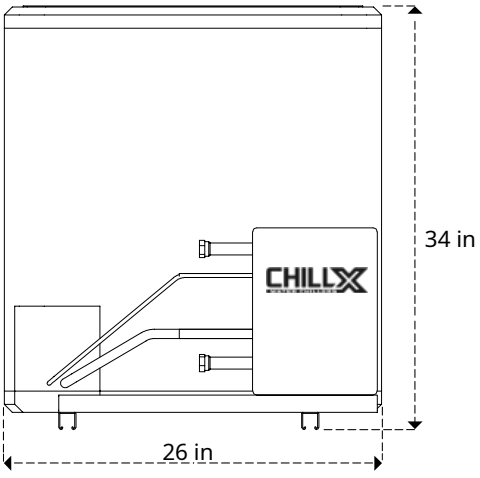

SIDE

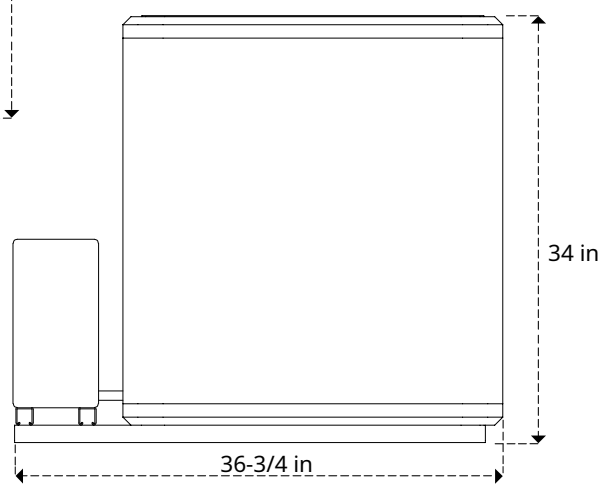

PO Box 66032 Austin, TX 78766 | 800.886.1353

ChillXChillers.com