

# MODEL CXPA036CNS1

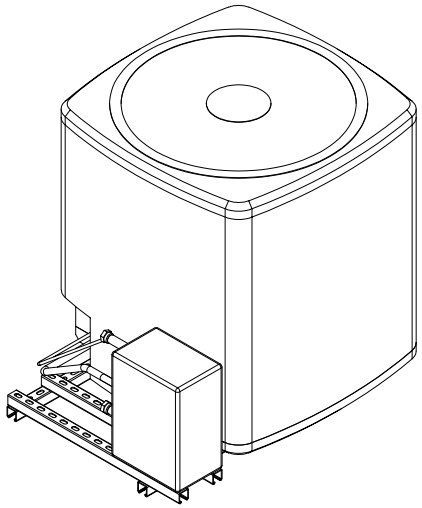


SPECIFICATIONS:
- 36,000 BTU/HR at 95°F ambient & 55°F water out
- 18,000 BTU-HR at 95°F ambient & 28°F water out
- Electrical: 208/230V, 60hz single-phase
- Minimum Circuit Ampacity: 21 Amps, Max Fuse Size 35 Amps
- (1) Copeland scroll compressor
- Stainless Steel Evaporator [Sized For Glycol]
- R-32 Refrigerant
- 1" FNPT Water/Glycol Connections
- Flow switch safety cut-off
- Low ambient start of 0°F
- Approximate shipping weight 275 LBS
- Dimensions: 50-1/2" long, 35-1/2" wide, 37-1/4" tall
- ETL & UL Listed Components
- Decibels: 72

OPTIONS:
- Low Temp (LT)
- Temp Controller Extension (+19')
- Caster Wheels
- Two-stage Compressor
- Anti-corrosive Coating


TOP

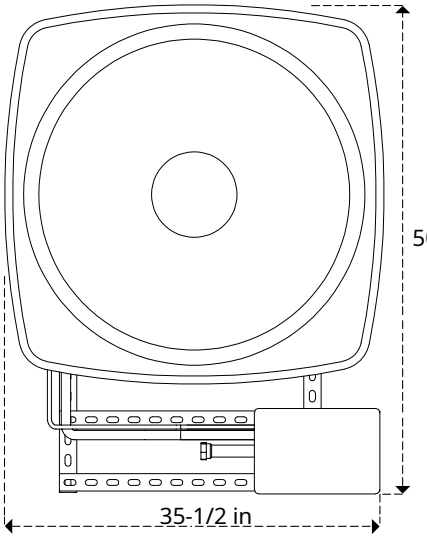


FRONT

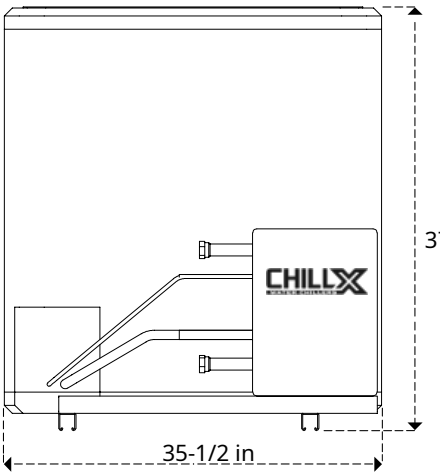


SIDE

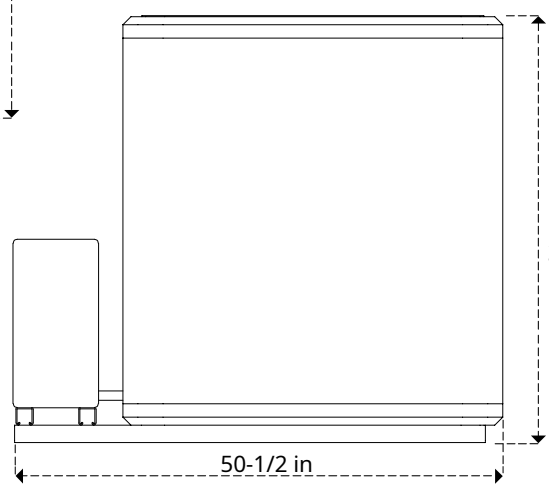


PO Box 66032 Austin, TX 78766 | 800.886.1353

ChillXChillers.com