

MODEL CXPA042CNS1

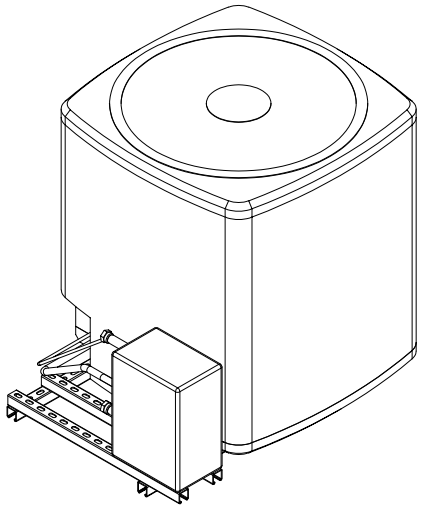


SPECIFICATIONS:
- 42,000 BTU/HR at 95°F ambient & 55°F water out
- 21,000 BTU/HR at 95°F ambient & 28°F water out (w/ LT)
- Electrical: 208/230V, 60hz single-phase
- Minimum Circuit Ampacity: 19, Max Fuse Size 30 Amps
- (1) Copeland scroll compressor
- Stainless Steel Brazed Plate Evaporator [Sized For Glycol]
- R-32 Refrigerant
- 1" FNPT Water/Glycol Connections
- Flow switch safety cut-off
- Low ambient start of 0°F
- Approximate shipping weight 290 LBS
- Dimensions: 45-1/2" long, 59" wide, 37.25" ta
- ETL & UL Listed Components
- Decibels: 72

OPTIONS:
- Low Temp (LT)
- Temp Controller Extension (+19')
- Caster Wheels
- Two-stage Compressor
- Anti-corrossive Coating


TOP

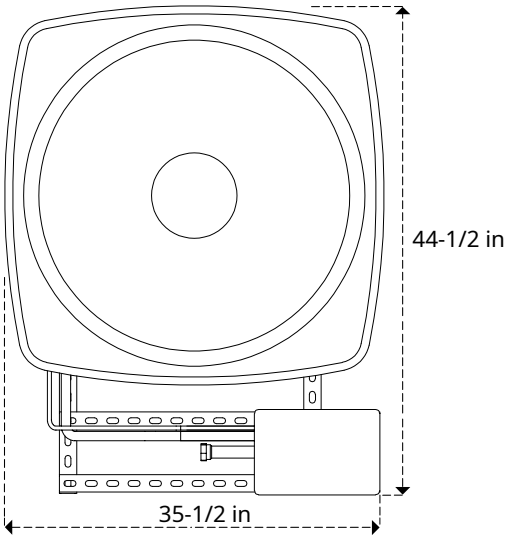

FRONT

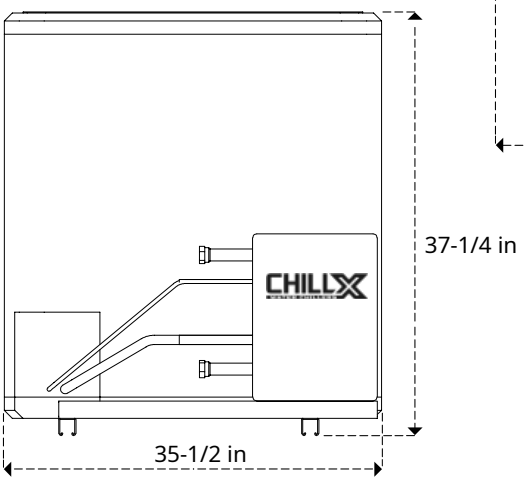

SIDE

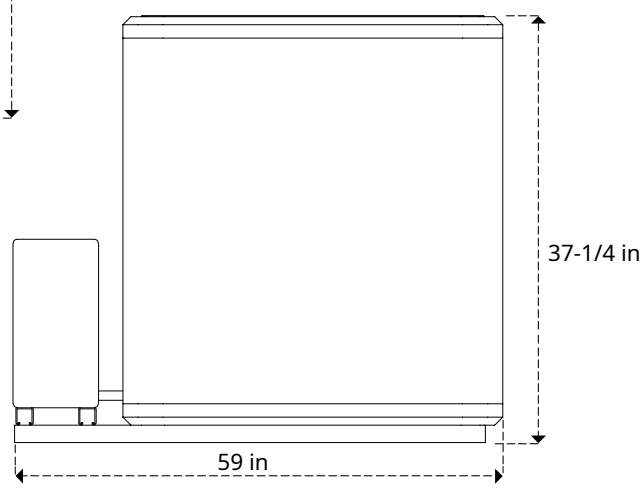

PO Box 66032 Austin, TX 78766 | 800.886.1353

ChillXChillers.com